

# Using cubature Kalman filter to estimate the vehicle state

**Xiaoshuai Xin\*, Jinxi Chen**

*School of Automation Engineering, University of Electronic Science and Technology of China. No.2006, Xiyuan Ave, Chengdu, China*

*Corresponding author's e-mail: xinxiaoshuai@gmail.com*

*Received 1 March 2014, www.cmnt.lv*

## Abstract

The vehicle state is of significant to examine and control vehicle performance. But some vehicle states such as vehicle velocity and side slip angle which are vital to active safety application of vehicle can not be measured directly and must be estimated instead. In this paper, a Cubature Kalman Filter (CKF) based algorithm for estimation vehicle velocity, yaw rate and side slip angle using steering wheel angle, longitudinal acceleration and lateral sensors is proposed. The estimator is designed based on a three-degree-of-freedom (3DOF) vehicle model. Effectiveness of the estimation is examined by comparing the outputs of the estimator with the responses of the vehicle model in CarSim under double lane change and slalom conditions.

*Keywords:* cubature Kalman filter, vehicle state, 3DOF, CarSim

## 1 Introduction

A variety of active vehicle safety applications are being developed in modern cars to reduce driver burden and road accidents. Traction control system (TCS) and electronic stability program (ESP) are two popular active safety applications in vehicles. TCS concerned with controlling longitudinal motion of the vehicle and ESP concerned with controlling lateral motion of the vehicle. Traction control system works by controlling slip ratio of the four vehicle wheels. Although vehicle speed is required to calculate the slip ratio of the wheel in TCS, the absolute vehicle speed can not be accurately measured by wheel speed because of wheel slip. ESP works by controlling yaw rate and side slip angle of the vehicle. Side slip angle can not be measured directly. Due to these factors, vehicle speed and side slip angle are not directly measured on production cars and must be estimated instead.

Although there are other nonlinear observer [1-5] based study about vehicle state estimation, the main research activities in the field concentrate on the application of Kalman filter theory, which is the most powerful tool for multi-sensor data fusion problems [6]. In [7-9], Kalman filter is used to estimate yaw rate, lateral acceleration and tire slip angle with linear vehicle model. Since Kalman filter is based on linear stochastic differential equations, it can only be used in the linear system estimation. As a nonlinear filter, extended Kalman filter (EKF) extend the use of Kalman filtering through a linearisation procedure. Ray proposes an extended Kalman filter (EKF) based method for estimating vehicle speed, braking forces, wheel slip and side-slip angle [10]. A nonlinear extended adaptive.

Kalman filter is proposed for the estimation of vehicle handling dynamic states in [11]. In [12-13], dual EKF is used for vehicle state and parameter estimation. The EKF works well in many application, but may suffer from large estimate errors when system have strong nonlinearities, and also suffer from the computation burden of the Jacobians [14]. Unscented Kalman filter (UKF) is used to vehicle state estimation because it overcomes these hurdles [15]. The UKF reduces computational costs compared to EKF and

needn't linearize the system and measurement equations as required by the EKF.

Recently, a cubature Kalman filter is proposed by Arasaratnam and Haykin, which improves the performance over UKF [16]. Since nonlinear filtering can be reducing to a problem of how to compute integral, cubature Kalman Filter introduce a third-degree spherical-radial cubature rule to achieve the cubature points which are used to approximate the multi-dimensional integral [14]. CKF has been proposed and used in many application, such as positioning [17-18] and attitude estimation [19]. For nonlinear system with additive Gaussian noise, cubature Kalman filter (CKF) can achieve more accurately than the UKF with similar computational complexity [20].

In this paper, we propose a CKF based estimator with a 3DOF vehicle is to estimate vehicle velocity, yaw rate and side slip angle. The inputs of the estimator are steering wheel angle, longitudinal acceleration and lateral acceleration with additive noise. Effectiveness of the estimation is examined by co-simulation between the software CarSim and Matlab-Simulink under double lane change and slalom conditions.

The rest of paper is structured as follow: The 3DOF vehicle model are described in Section 2. CKF based estimator is presented in Section 3. Our experiments and results are introduced in Section 4. Finally the main conclusion and future works are summarized in Section 5.

## 2 Vehicle model

The proposed method is based on a nonlinear 3DOF vehicle model, which is shown in Figure 1.

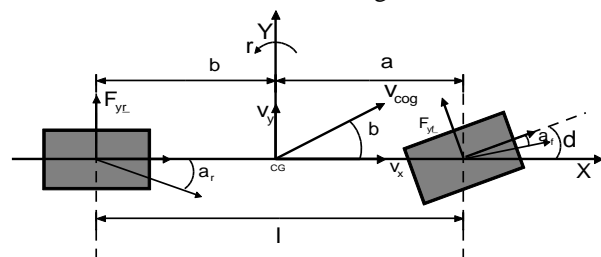


FIGURE 1 Nonlinear 3DOF vehicle model

Segel present a vehicle model with 3DOF in order to describe lateral movements including both roll motion and yaw motion [21]. By reducing the roll motion, a two-degrees of freedom linear bicycle model is obtained [22]. The linear two degrees of freedom related to vehicle body are yaw rate ( $r$ ) and side slip ( $\beta$ ). The motion of yaw rate is described as:

$$\dot{r} = \frac{a^2 C_f + b^2 C_r}{I_z v_x} r + \frac{a C_f - b C_r}{I_z} \beta - \frac{a C_f}{I_z} \delta, \quad (1)$$

where  $a$  is the distance from the front axel to the centre of gravity (CG),  $b$  is the distance from the rear axel to CG,  $C_f$  is the effective cornering stiffness of the front axel,  $C_r$  is the effective cornering stiffness of the rear axel,  $I_z$  is the vehicle moment of inertia about Z axis and  $\delta$  is the steering wheel angle.

The motion of side slip is described as:

$$\dot{\beta} = \left( \frac{a C_f - b C_r}{m v_x^2} - 1 \right) r + \frac{C_f + C_r}{m v_x} \beta - \frac{C_f}{m v_x} \delta, \quad (2)$$

where  $m$  is vehicle mass and  $v_x$  is the longitudinal velocity. In order to estimate the longitudinal velocity of the vehicle, longitudinal motion is required.

The longitudinal motion is described as:

$$\dot{v}_x = r \beta v_x + a_x. \quad (3)$$

Equations (1), (2) and (3) form the nonlinear three degrees of freedom of vehicle model. In this paper,  $[\gamma \quad \beta \quad v_x]^T$  is the state vector of the proposed estimator, and  $a_y$  is the measurement. The measurement equation is written as:

$$a_y = \left( \frac{a C_f - b C_r}{m v_x} - 1 \right) r + \frac{C_f + C_r}{m} \beta - \frac{C_f}{m} \delta. \quad (4)$$

### 3 CKF state estimation

#### 3.1 CUBATURE KALMAN FILTER

Kalman filter is a special case of the Bayesian filter, which assuming that the dynamic system is linear and both the dynamic noise and measurement noise are statistically independent processes [23]. Considering a nonlinear discrete-time system of the form

$$x(k) = f(x(k-1), u(k)) + w(k-1), \quad (5)$$

$$y(k) = h(x(k-1), u(k-1), v(k)). \quad (6)$$

where  $x(k)$  is a N-dimensional state vector, the output  $y(k)$  is a M-dimensional vector,  $u(k)$  is the known control input,  $w(k-1)$  and  $v(k)$  are independent process and measurement Gaussian noise sequences with zero means and covariance  $Q$  and  $R$  respectively. The heart of the Bayesian filter is to compute multi-dimensional weighted integral of the form

$$I(f) = \int_{R^n} f(X) \omega(X) dX. \quad (7)$$

Since it's difficult to obtain the solution of the above integral, the challenge is to compute the integral

numerically by finding a set of cubature point  $\omega_i$  and  $\xi_i$  that approximates the integral  $I(f)$  by a weight sum of function evaluations

$$I(f) \approx \sum_{i=1}^m \omega_i f(\xi_i). \quad (8)$$

Cubature Kalman Filter introduce a third-degree spherical-radial cubature rule to achieve the cubature point as:

$$\xi_i = \sqrt{n} [1]_i, \quad (9)$$

$$\omega_i = \frac{1}{2n} \quad i = 1, 2, \dots, 2n. \quad (10)$$

The entire algorithm is presented as follows:

1. Time update

Evaluate the cubature points

$$S(k-1) = chol\{P(k-1)\}, \quad (11)$$

$$\hat{X}_i(k-1) = S(k-1)\xi_i + X(k-1). \quad (12)$$

where  $P(k-1)$  is associated covariance matrix,  $chol\{\}$  denotes a Cholesky decomposition of a matrix.

Evaluate the propagated cubature points

$$X_i^*(k-1) = f(\hat{X}_i(k-1), U(k)). \quad (13)$$

Estimate the predicated state

$$\hat{X}(k) = \sum_{i=1}^{2n} \omega_i X_i^*(k-1). \quad (14)$$

Estimate the predicated error covariance

$$\hat{P}(k) = \sum_{i=1}^{2n} \omega_i X_i^*(k-1) X_i^*(k-1)^T - \hat{X}(k) \hat{X}(k)^T + Q. \quad (15)$$

2 Measurement update

Evaluate the cubature points

$$\hat{S}(k) = chol\{\hat{P}(k)\}, \quad (16)$$

$$\hat{X}_i(k) = \hat{S}(k)\xi_i + \hat{X}(k). \quad (17)$$

Evaluate the propagated cubature points

$$Y_i^*(k) = h(\hat{X}_i(k), U(k)). \quad (18)$$

Estimate the predicated measurement

$$\hat{Y}(k) = \sum_{i=1}^m \omega_i Y_i^*(k). \quad (19)$$

Estimate the innovation covariance matrix

$$P_{yy}(k) = \sum_{i=1}^m \omega_i Y_i^*(k) Y_i^*(k)^T - y(k) y(k)^T + R. \quad (20)$$

Estimate the cross-covariance matrix

$$P_{xy}(k) = \sum_{i=1}^m \omega_i \hat{X}_i(k) Y_i^*(k)^T - \hat{X}(k) \hat{Y}(k)^T. \quad (21)$$

Estimate the Kalman gain

$$K(k) = P_{xy}(k)P_{yy}^{-1}(k). \tag{22}$$

Estimate the updated state

$$X(k) = \hat{X}(k) + K(k)(Y(k) - \hat{Y}(k)). \tag{23}$$

Estimate the corresponding error covariance

$$P(k) = \hat{P}(k) + K(k)P_{yy}(k)K(k)^T. \tag{24}$$

The proposed state estimation method is based on CKF, the block diagram of the method is shown in Figure 2. As can be seen in Figure 2, the state estimator is designed to estimate the vehicle state by using steering wheel angle, lateral and longitudinal acceleration signals.

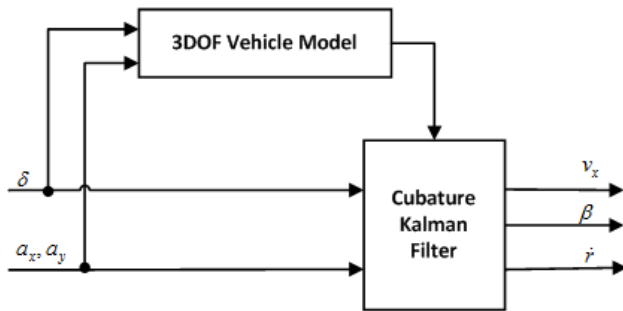


FIGURE 2 Estimation block diagram

For the state estimator, the state vector is written as

$$x(k) = [\gamma \quad \beta \quad v_x]^T. \tag{25}$$

The measurement is written as

$$y(k) = a_y. \tag{26}$$

The known input is written as

$$u = [\delta \quad a_x]^T. \tag{27}$$

The state vector equation of the proposed estimator can be written as:

$$\begin{cases} r(k) = \left( \frac{a^2 k_f + b^2 k_r}{I_z v_x} r(k-1) + \frac{a k_{l1} - b k_{l2}}{I_z} \beta(k-1) - \frac{a k_{l1}}{I_z} \delta(k-1) \right) \Delta t + r(k-1) \\ \beta(k) = \left( \frac{a k_f - b k_r}{m v_x^2} r(k-1) + \frac{k_f + k_r}{m v_x} \beta(k-1) - \frac{k_f}{m v_x} \delta(k-1) \right) \Delta t + \beta(k-1) \\ v_x(k) = \left( r(k-1) \beta(k-1) v_x(k-1) + a_x(k) \right) \Delta t + v_x(k-1) \end{cases}, \tag{28}$$

where  $\Delta t = t_{k+1} - t_k$  is the sampling interval.

The measurement matrix is described as:

$$H = \begin{bmatrix} (a k_f - b k_r) / (m v_x) \\ (k_f + k_r) / m \\ -(a k_f - b k_r) / (m v_x^2) \end{bmatrix}. \tag{29}$$

### 4 Experiments

Two simulation cases under double lane change and slalom conditions are conducted based on Matlab/Simulink and CarSim. CarSim is a multi-DOF nonlinear simulation software for vehicle dynamics control and integration, and

detailed mathematical models for simulating automotive vehicle dynamics have been in use for decades [24]. Since CarSim can work with Simulink, we build estimation model in Simulink and test it with the full nonlinear CarSim vehicle model. The Simulink Model for the proposed estimation is shown as Figure 3. The known parameters of the vehicle model are listed in Table 1.

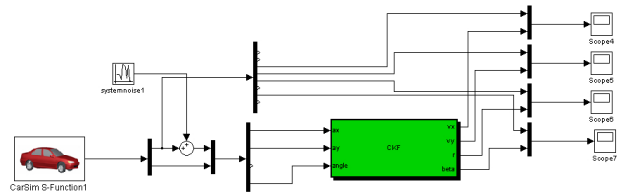


FIGURE 3 The Simulink model

TABLE 1 Specification of the vehicle model

Parameter	Symbol	Unit	Value
Vehicle mass	$m$	kg	1650
Vehicle moment of inertia about Z axis	$I_z$	$kg m^2$	3234
Distance from front axel to CG	$a$	m	1.4
Distance from rear axel to CG	$b$	m	1.65
Effective cornering stiffness of the front axel	$C_f$	N/rad	- 97000
Effective cornering stiffness of the rear axel	$C_r$	N/rad	- 120000

The process noise covariance of CKF is  $Q = I_{3 \times 3}$ , and measurement noise covariance is  $R = [10000]$ . The sampling interval is  $\Delta t = 0.001s$ .

#### 4.1 DOUBLE LANE CHANGE TEST

The initialization of the State vector of the double lane change simulation case is  $x(0) = [0, 0, 80]^T$ . Simulation results are shown in Figure 4, Figure 5, Figure 6, Figure 7, Figure 8 and Figure 9. For the double lane change test, Figure 4, Figure 5 and Figure 6 are respectively the vehicle sensor signal of steering wheel angle, longitudinal acceleration and lateral acceleration.

As can be seen from Figure 4, Figure 5 and Figure 6, all simulated sensor signals for CKF contain white noise which simulates the sensor noise in the real world. Figure 7, Figure 8 and Figure 9 are respectively the estimation of longitudinal velocity, side slip angle and yaw rate. As can be seen from Figure 7, Figure 8 and Figure 9, the estimated value of longitudinal velocity, side slip angle and yaw rate capture the trends in the data from CarSim. The additive noise of the sensor signal is filter by the CKF well.

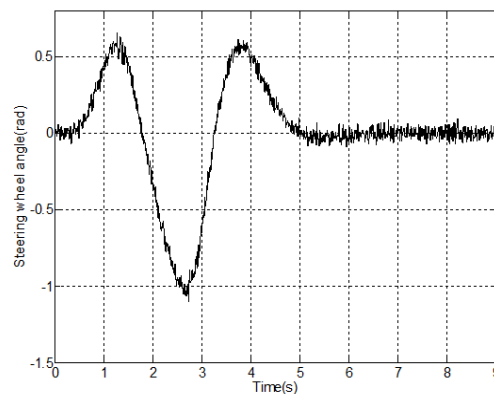


FIGURE 4 Steering angle with noise

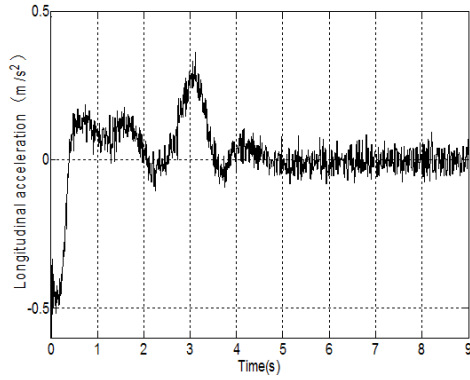


FIGURE 5 Longitudinal acceleration with noise

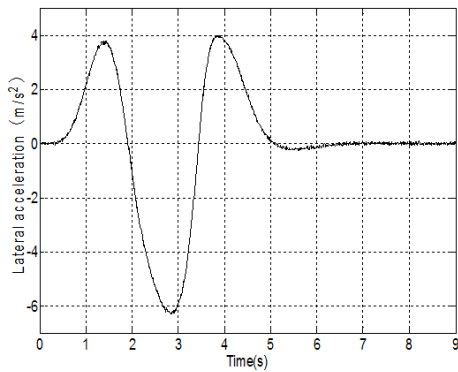


FIGURE 6 Lateral acceleration with noise

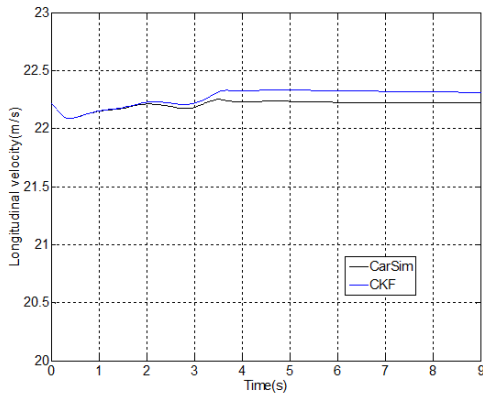


FIGURE 7 Estimation of longitudinal velocity

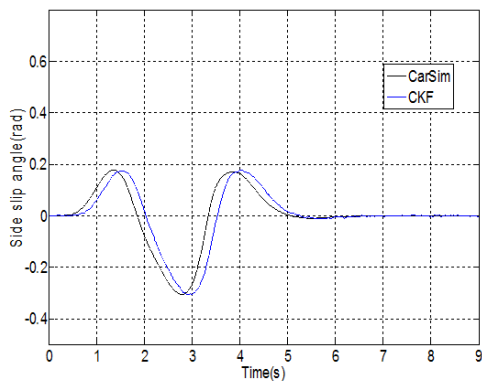


FIGURE 8 Estimation of side slip angle

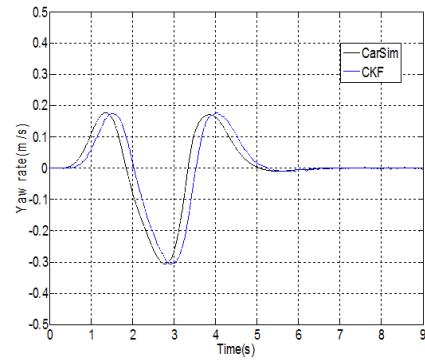


FIGURE 9 Estimation of yaw rate

4.2 SLALOM TEST

The initialisation of the State vector of the slalom simulation case is  $x(0) = [0, 0, 50]^T$ . Simulation results are shown in Figure 10, Figure 11, Figure 12, Figure 13, Figure 14 and Figure 15.

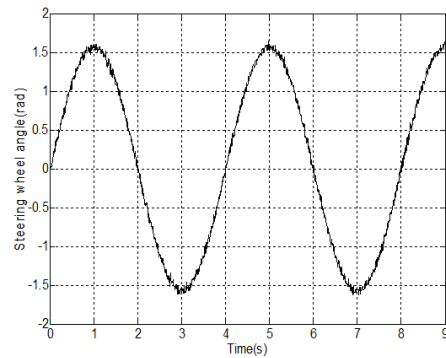


FIGURE 10 Steering angle with noise

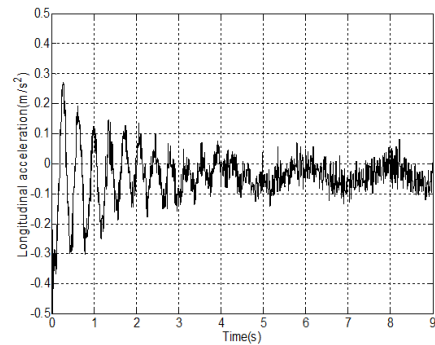


FIGURE 11 Longitudinal acceleration with noise

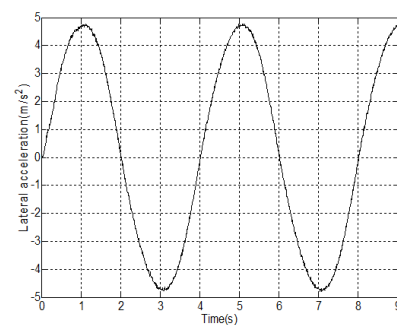


FIGURE 12 Lateral acceleration with noise




FIGURE 13 Estimation of longitudinal velocity




FIGURE 14 Estimation of side slip angle




FIGURE 15 Estimation of yaw rate

For the slalom test, Figure 10, Figure 11 and Figure 12 are respectively the vehicle sensor signal of steering wheel angle, longitudinal acceleration and lateral acceleration. Figure 13, Figure 14 and Figure 15 are respectively the estimation of longitudinal velocity, side slip angle and yaw rate. As can be seen from Figure 13, Figure 14 and Figure 15, the estimated value of longitudinal velocity, side slip angle and yaw rate capture the trends in the data from CarSim. The additive noise of the sensor signal is filter by the CKF well.

## 5 Conclusions

In this paper, some works are proposed to estimate vehicle speed, side slip angle and yaw rate of the vehicle. Firstly, a nonlinear 3DOF vehicle model is presented. Secondly, the estimator based on CKF is designed. Finally, the estimation is examined by comparing the outputs of the estimator with the responses of the vehicle model in CarSim under double lane change and slalom conditions. Experimental results of the simulation show the effectiveness of the proposed method.

## Acknowledgements

This research has been supported by the National Nature Science Foundation of China under Grant No. 61201010.

## References

- [1] Hac A, Simpson M D 2000 Estimation of vehicle side slip angle and yaw rate *SAE Technical Paper*
- [2] Imsland L, Johansen T A, Fossen T I, H Aa Vard Fj Ae R Grip, Kalkkuhl J C, Suissa A 2006 Vehicle velocity estimation using nonlinear observers *Automatica* **42**(12) 2091-103
- [3] Shraim H, Ananou B, Fridman L, Noura H, Ouladsine M 2006 Sliding mode observers for the estimation of vehicle parameters *Forces and states of the center of gravity* 1635-40
- [4] Baffet G, Charara A, Lechner D 2009 Estimation of vehicle sideslip, tire force and wheel cornering stiffness *Control Engineering Practice* **17**(11) 1255-64
- [5] Jaballah B, M'Sirdi N K, Naamane A 2014 Partial vehicle state estimation using High Order Sliding *Mode Observers* 1-7
- [6] Antonov S, Fehn A, Kugi A 2011 Unscented Kalman filter for vehicle state estimation *Vehicle System Dynamics* **49**(9) 1497-520
- [7] Venhovens P J, Naab K 1999 Vehicle dynamics estimation using Kalman filters *Vehicle System Dynamics* **32**(2-3) 171-84
- [8] Ryu J, Moshchuk N K, Shih-Ken Chen 2007 Vehicle State Estimation for Roll Control System *2007 American Control Conference* 1618-23
- [9] King Tin Leung, Whidborne J F, Purdy D, Barber P 2011 Road vehicle state estimation using low-cost GPS/INS *Mechanical Systems and Signal Processing* **25**(6) 1988-2004
- [10] Ray L R 1992 Nonlinear estimation of vehicle state and tire forces 526-30
- [11] Best M C, Gordon T J, Dixon P J 2000 An extended adaptive Kalman filter for real-time state estimation of vehicle handling dynamics *Vehicle System Dynamics* **34**(1) 57-75
- [12] Wenzel T A, Burnham K J, Blundell M V, Williams R A 2006 Dual extended Kalman filter for vehicle state and parameter estimation *Vehicle System Dynamics* **44**(2) 153-71
- [13] Changfu Zong, Dan Hu, Hongyu Zheng 2013 Dual extended Kalman filter for combined estimation of vehicle state and road friction *Chinese Journal of Mechanical Engineering* **26**(2) 313-24
- [14] Dai Hong-de, Dai Shao-wu, Cong Yuan-cai, Wu Guang-bin 2012 Performance comparison of EKF/UKF/CKF for the tracking of ballistic target *TELKOMNIKA Indonesian Journal of Electrical Engineering* **10**(7) 1692-99
- [15] Tianjun Zhu and Hongyan Zheng 2008 *Vehicle State Estimation Based on Unscented Kalman State Estimation* **1**(42-46)
- [16] Arasaratnam I, Haykin S 2009 Cubature Kalman Filters *IEEE Transactions on Automatic Control* **54**(6) 1254-69
- [17] Pesonen H, Piche R 2010 Cubature-based Kalman filters for positioning 45-9
- [18] Fernandez-Prades C, Vil A Valls J 2010 *Bayesian nonlinear filtering using quadrature and cubature rules applied to sensor data fusion for positioning* 1-5
- [19] Chao Li, Quan-Bo Ge 2011 *SCKF for MAV attitude estimation* **3**(1313-18)
- [20] Huimin Chen 2012 *Adaptive cubature Kalman filter for nonlinear state and parameter estimation* 1413-20
- [21] Segel L 1956 Theoretical prediction and experimental substantiation of the response of the automobile to steering control *Proceedings of the Institution of Mechanical Engineers: Automobile Division* **10**(1) 310-30
- [22] Stephant J, Charara A, Meizel D 2004 Virtual sensor: application to vehicle sideslip angle and transversal forces *Industrial Electronics, IEEE Transactions on* **51**(2) 278-89
- [23] Kalman R E 1960 A new approach to linear filtering and prediction problems *Journal of Fluids Engineering* **82**(1) 35-45
- [24] CarSim User Manual 2009 Mechanical Simulation Corp *Ann Arbor, MI*

Authors	
	<p><b>Xiaoshuai Xin, 1982, Henan, China</b></p> <p><b>Current position, grades:</b> The lecturer, PhD, student of School of Automation Engineering, University of Electronic Science and Technology of China <b>University studies:</b> University of Electronic Science and Technology of China, in the School of Automation Engineering (2006-2011) <b>Scientific interest:</b> Robust control and optimal control, advanced control of vehicle <b>Publications:</b> 11 papers <b>Experience:</b> He has completed 6 scientific research projects</p>
	<p><b>Jinxi Chen, 1988, Fujian, China</b></p> <p><b>Current position, grades:</b> Engineer of FAW-VOLKSWAGEN, Master of Science <b>University studies:</b> University of Electronic Science and Technology of China, in the School of Automation Engineering (2001-2005) <b>Scientific interest:</b> Signal processing, Vehicle control <b>Publications:</b> 3 papers <b>Experience:</b> He has completed 2 scientific research projects</p>